STATUTORY INSTRUMENTS

1980 No. 1444

HIGHWAYS, ENGLAND AND WALES

The Suffolk County Council (Stoke Bridge) Scheme 1979 Confirmation Instrument 1980

Made - - - - 25th September 1980

The Minister of Transport makes this Instrument in exercise of powers conferred by section 3 of the Highways (Miscellaneous Provisions) Act 1961(a) and now vested in him(b) and of all other enabling powers:—

1. The Suffolk County Council (Stoke Bridge) Scheme 1979 is hereby confirmed without modifications.

2. The said Scheme as confirmed (hereinafter referred to as "the Scheme") is set out in the Schedule hereto and copies of the Scheme with its accompanying plan are deposited at the offices of the Department of Transport, Becket House, Lambeth Palace Road, London SE1 7ER, and at the offices of the Suffolk County Council at County Hall, Ipswich.

3. The Scheme will become operative on the date on which notice that it has been confirmed is first published in accordance with paragraph 1 of Schedule 2 to the Highways Act 1959(c).

4. This Instrument may be cited as the Suffolk County Council (Stoke Bridge) Scheme 1979 Confirmation Instrument 1980.

G. D. Spearing
An Under Secretary in the
Department of Transport.

Signed by authority
of the Minister of Transport
25th September 1980.

(a) 1961 c. 63. (b) S.I. 1970/1681 and 1979/571. (c) 1959 c. 25.

[DET 34916]

THE SCHEDULE TO THE INSTRUMENT

THE SUFFOLK COUNTY COUNCIL (STOKE BRIDGE) SCHEME 1979

The Suffolk County Council (hereinafter referred to as "the Council") make this Scheme in exercise of their powers under Section 3 of the Highways (Miscellaneous Provisions) Act 1961 and all other enabling powers:—

1. The Council are authorised to construct over the navigable waters of the River Orwell the bridge specified in the schedule to this Scheme as part of the highway which they are proposing to improve between St. Peter's Street and Tyler Street in the Borough of Ipswich in the County of Suffolk.

2. This Scheme may be cited as the Suffolk County Council (Stoke Bridge) Scheme 1979.

Given under the Common Seal of the Council the 18th day of December One thousand nine hundred and seventy-nine.

The COMMON SEAL of SUFFOLK COUNTY COUNCIL was affixed in the presence of:— } (L.S.)

K. E. KEMP-TURNER } A Member of the Council

K. W. S. ASHURST } A duly authorised Officer of the Council

THE SCHEDULE TO THE SCHEME

PLAN AND SPECIFICATIONS OF THE A137 SECOND STOKE BRIDGE

Location

The bridge will be situated immediately up-stream of the existing Stoke Bridge as shown on Plan A annexed hereto sealed by the Council and marked "The Suffolk County Council (Stoke Bridge) Scheme 1979".

Span

The total length between abutments will be 23·20 metres (76·11 feet) as shown on the said Plan A annexed hereto.

Headway

2·075 metres (6·81 feet) above mean high water spring tides at the centre of the bridge and 1·025 metres (6·31 feet) above mean high water spring water tides at the abutments as shown on the said Plan A annexed hereto.


Waterway


Minimum square waterway will be 23·20 metres (76·11 feet) approximately as shown on the said Plan A annexed hereto.

Width

The square width of the bridge will be 11·10 metres (36·42 feet).

The Suffolk County Council (Stoke Bridge) Scheme 1979 (Extracted from Plan A)

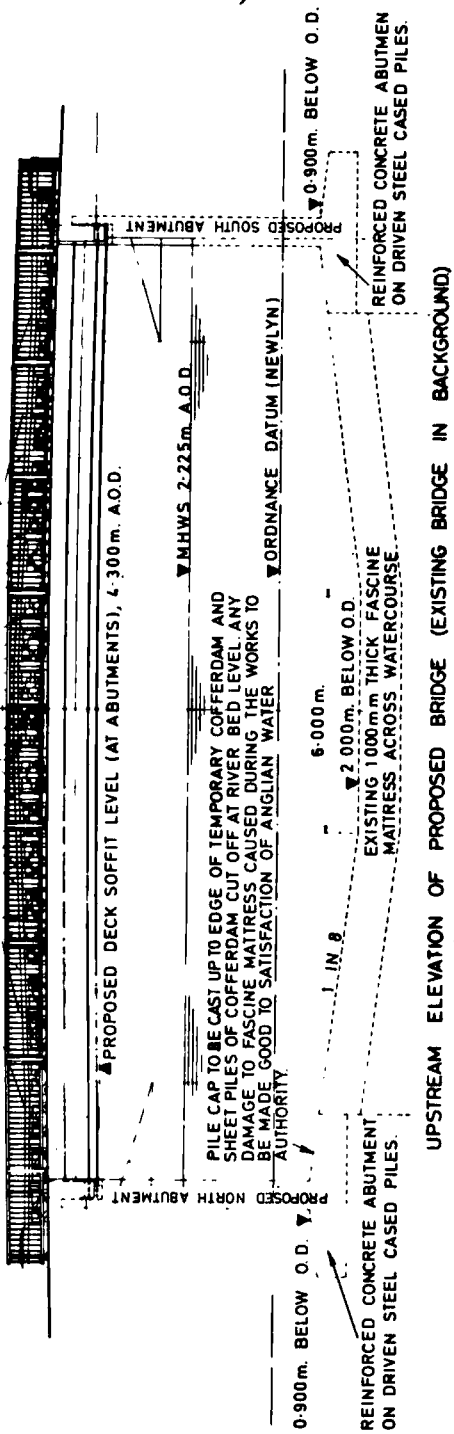

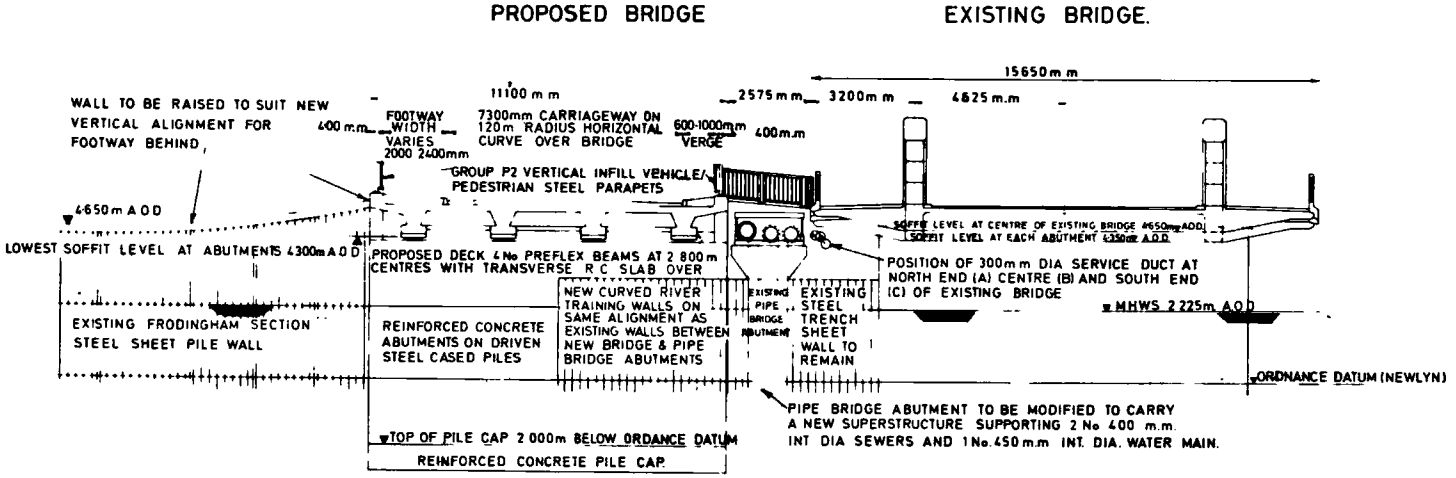

CROSS-SECTION ON 'A-A THROUGH CENTRE OF PROPOSED AND EXISTING BRIDGES.